 <p>Induction Highbay MG-HO3NM</p>	Power Consumption	40/80/120/150/200/250
	Working Voltage	110/220/277
	Luminous Flux	3200/6400/9600/12000/16000
	Certifications	CE, UL,FCC, IEC/EN60598,CB,CCC, IP54
	Beam Spread	Clear
	Replaces	HID-70W/150W/250W/400W
	Colour Temperature	2700 (UW) 3500 (W) 5000 (D) 6500 (UD)

Special Features

1. Die cast aluminium ballast housing finished in light grey.
2. Hinged diffuser cover for ease of access to lamp and control gear.
3. Mechanical clamps to ensure IP integrity.
4. 4mm toughened tempered diffuser.
5. UV anti-ageing silicon gasket.
6. Reflectors made of high purity aluminium up to 80% reflectance.

Optional:


1. Nano-Grade reflector with up to 94% of direct and diffuse reflectance.
2. Frost glass/PC diffusers.

Installation:

Ceiling mount, suitable for M10 threaded rod hanging.

Applications:

Warehouse/Car Park/Repair and Maintenance Centre/ Factory/Retail Outlets.

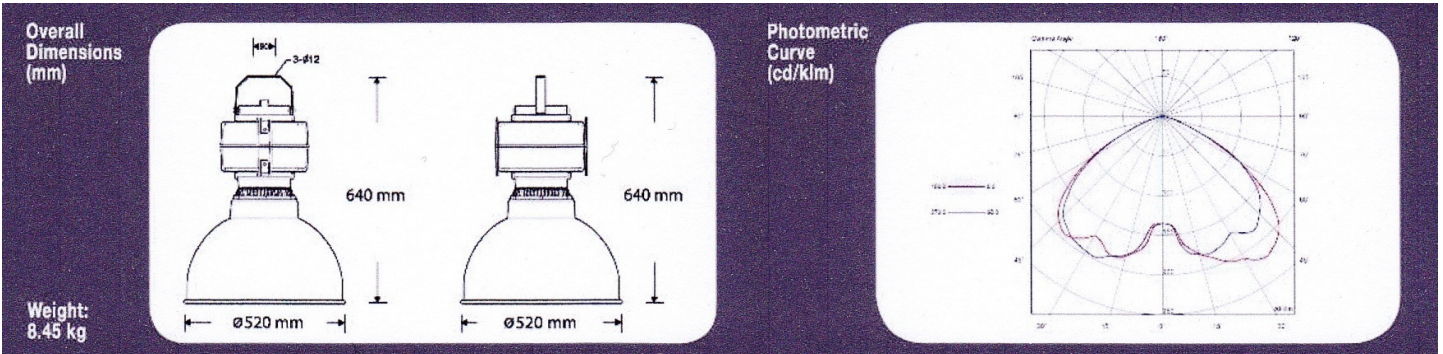

Product Code	Wattage (W)	Colour Temperature (K)	Operating Voltage (V)	Ambient Temperature (°C)	Luminaire Dimensions (Ø x H mm)	Note
MG-H03NMR40W	40	6500 (UD) 5000 (D) 3500 (W) 2700 (UW)	110/220/277	-15~40	520 x 640	Optional Diffusers: Frost glass (F), PC (P), Optional Reflector: Nanoflex (NF)
MG-H03NMR80W	80					
MG-H03NMR120W	120					
MG-H03NMR150W	150					
MG-H03NMR200W	200					
MG-H03NMR250W	250					

Ordering code: MG-H03NMR 40W/80W/150W/200W/250W –UD/D/W/UW –F/P/NF

Applications: Warehouse/ Car Park/ Repair and Maintenance Centre/ Factory/ Retail Outlets