


| | | |
|---|---------------------------|---|
|  <p>Induction Lamp: flood MG-F03</p> | Power Consumption | 80/120 |
| | Working Voltage | 110/220/277 |
| | Luminous Flux | 6400/9600 |
| | Certifications | CE, UL, FCC IEC/EN 60598, CB, CCC, IP65 |
| | Beam Spread | |
| | Replaces | HID – 150W- 250W |
| | Colour Temperature | 2700(UW)/3500(W)/5000(D)/6500(UD) |

Special Features

1. Die cast aluminium ballast housing finished in light black.
2. Hinged diffuser cover for ease of access to lamp and control gear.
3. Stainless Steel external fasteners
4. Mechanical clamps to ensure IP integrity
5. 4mm toughened tempered diffuser
6. UV anti-ageing silicon gasket
7. Reflectors made of high purity aluminum with up to 80% reflectance
8. Angle adjustable mounting bracket.
9. 4mm toughened tempered diffuser.

Optional:


1. Nano-Grade reflector with up to 94% of direct and diffused reflectance.
2. Frost glass/PC diffusers.

Installation:

Supplied with a mounting bracket for anchor fixing

Applications:


Building Landscape / Car Park / Billboards / Indoor Stadium / Tennis Court /
Swimming Pool / Outdoor Areas

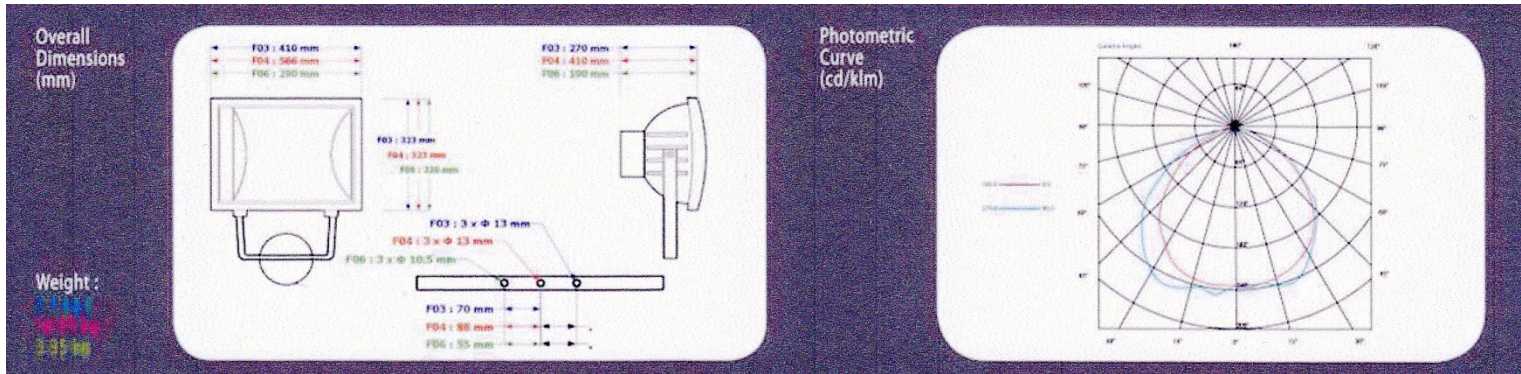

| Product Code | Wattage (W) | Colour Temperature (K) | Operating Voltage (V) | Ambient Temperature (°C) | Luminaire Dimensions (Ø x H mm) | Note |
|--------------|-------------|------------------------|-----------------------|--------------------------|---------------------------------|---|
| MG-F03Q80W | 80 | 6500 (UD) 5000 (D) | 110/220/277 | -15~40 | 410x323x270 | Optional Diffusers: Frost glass (F), PC (P), Optional Reflector: Nanoflex (NF) |
| MG-F03Q120W | 120 | 3500 (W) 2700 (UW) | | | | |

Ordering code: MG-F03Q 80W/120W-UD/D/W/UW -F/P/NF

Applications: Building Landscape / Car Park / Billboards / Indoor Stadium / Tennis Court /
Swimming Pool / Outdoor Areas

| | | |
|---|---------------------------|---|
|  <p>Induction Lamp: flood MG-F04</p> | Power Consumption | 150/200 |
| | Working Voltage | 110/220/277 |
| | Luminous Flux | 12000/16000 |
| | Certifications | CE, UL, FCC IEC/EN 60598, CB, CCC, IP65 |
| | Beam Spread | |
| | Replaces | HID – 250W/400W |
| | Colour Temperature | 2700(UW)/3500(W)/5000(D)/6500(UD) |

Special Features

1. Die cast aluminium ballast housing finished in light black.
2. Hinged diffuser cover for ease of access to lamp and control gear.
3. Stainless Steel external fasteners
4. Mechanical clamps to ensure IP integrity
5. 4mm toughened tempered diffuser
6. UV anti-ageing silicon gasket
7. Reflectors made of high purity aluminum with up to 80% reflectance
8. Angle adjustable mounting bracket.
9. 4mm toughened tempered diffuser.

Optional:


1. Nano-Grade reflector with up to 94% of direct and diffused reflectance.
2. Frost glass/PC diffusers.

Installation:

Supplied with a mounting bracket for anchor fixing

Applications:

Building Landscape / Car Park / Billboards / Indoor Stadium / Tennis Court /
Swimming Pool / Outdoor Areas

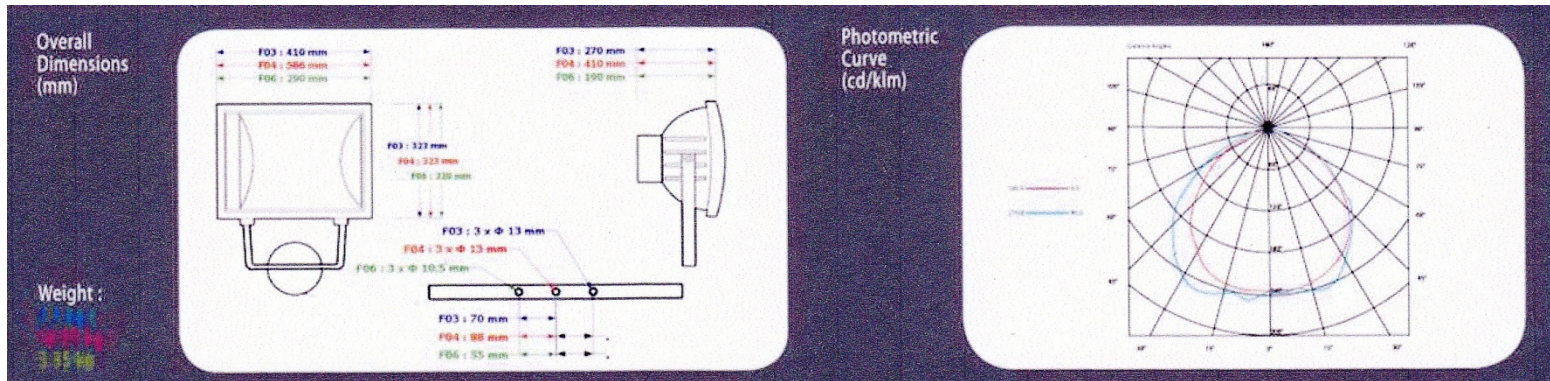

| Product Code | Wattage (W) | Colour Temperature (K) | Operating Voltage (V) | Ambient Temperature (°C) | Luminaire Dimensions (Ø x H mm) | Note |
|--------------|-------------|------------------------|-----------------------|--------------------------|---------------------------------|---|
| MG-F04Q150W | 150 | 6500 (UD) 5000 (D) | 110/220/277 | -15~40 | 566x323x410 | Optional Diffusers: Frost glass (F), PC (P), Optional Reflector: Nanoflex (NF) |
| MG-F04Q200W | 200 | 3500 (W) 2700 (UW) | | | | |

Ordering code: MG-F04Q 150W/200W-UD/D/W/UW -F/P/NF

Applications: Building Landscape / Car Park / Billboards / Indoor Stadium / Tennis Court /
Swimming Pool / Outdoor Areas