

## Description

The MGANTC is a surface LED downlight with deepened opal diffuser and cylindrical shape.

## Environment

Indoor

## Installation

Designed to be surface mounted

## Application

Suitable for retail, showrooms, hotels  
other similar applications



## General Data

Voltage	AC220-240V 50-60Hz
Power Factor	>0.90
Light Source	LED
LED Lifetime	50,000hrs/ L80B50
Operating temperature	0°C to +35°C
Materials	Opal diffuser UV stable Aluminium body, white finish
Installation	Designed to be surface mounted.

## Light Data

Lumens per Watt	107-116lm/W
Light Source	LED
CRI	80
Distribution	Direct


## Product Variants

Product Code	System Power (W)	System efficacy (lm/W)	Lumens (lm)	CCT (K)	Length mm	Width mm	Height mm	Weight kg
MGANTC LED1X1600 D345 T830	11.8	107	1261	3000	200	200	130	1
MGANTC LED1X2300 D346 T830	16	111	1774	3000	200	200	130	1
MGANTC LED1X3000 D347 T830	23.1	116	2458	3000	200	200	130	1
MGANTC LED1X1600 D345 T830	11.8	112	1321	4000	200	200	130	1
MGANTC LED1X2300 D346 T830	16	116	1858	4000	200	200	130	1
MGANTC LED1X3000 D347 T830	23.1	112	2575	4000	200	200	130	1

## Options

Driver with DALI interface	DALI
Driver with switch control dimming	SDIM
Emergency version 3 hours	EM3
Strain relief for power cable	1G
3000K	T830
4000K	T840

## Dimensions

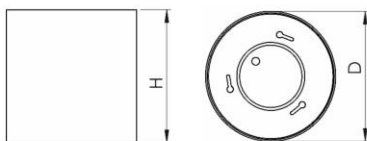

∅ D, mm	H, mm
200	130