

# E4 Panel

## V45501 - V45510

### Description


The E4 LED panel offers a modern alternative to the standard LED panel, ideal for reception areas, meeting rooms and offices

### Environment

Indoor

### Installation

Designed to be fitted in standard 15mm or 24mm ceiling grid

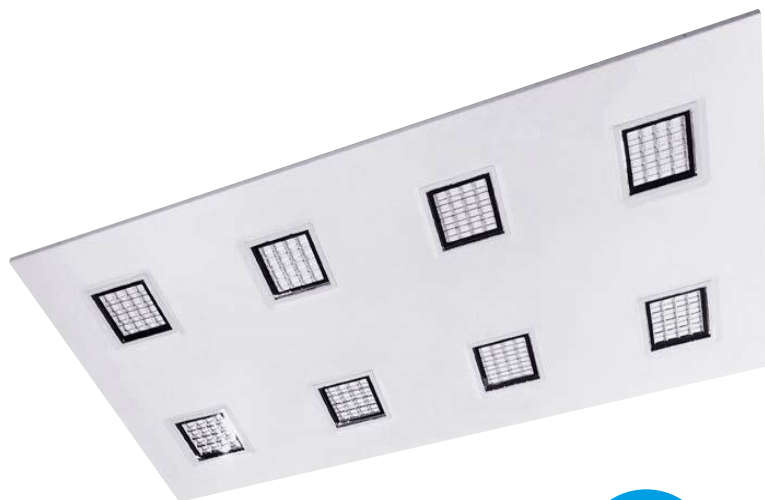

### Application

For use in commercial applications.

<b>5YR</b> Warranty	 <b>IP40</b> Protection	<b>50,000hrs</b> Lifetime
------------------------	-------------------------------------------------------------------------------------------------------------	------------------------------



### General Data

Voltage	AC220-240V 50-60Hz
Power Factor	>0.9
Light Source	LED
CCT	4000K
LED Lifetime	50,000hrs
Operating temp	-15°C to 25°C
Materials	Powder coated body and flame resistant PC Plug and play replaceable drivers and modules
Installation	To fit in standard 15mm or 24mm ceiling grid

### Light Data

Lumens per Watt	85-90lm/W
Light Source	LEDs
CRI	80
Distribution	Direct/indirect

# E4 Panel


## V45501 - V45510

### Product Variants

Product Code	System Power (W)	Lumens (lm)	CCT (K)	Length mm	Width mm	Height mm
V45501	25W	3100	4000	595	595	150
V45502	25W	3430	4000	595	595	150
V45503	38W	4600	4000	595	595	150
V45504	38W	4830	4000	595	595	150
V45505	25W	3100	4000	1195	295	115
V45506	25W	3430	4000	1195	295	115
V45507	38W	4700	4000	1195	295	115
V45508	38W	4900	4000	1195	295	115
V45509	53W	6360	4000	1195	595	115
V45510	53W	6850	4000	1195	595	115

### Options

OPTION	CODE
1-10V Dimming	/D
DALI Dimming	/DL
DSI Digital Dimming	/DD
Trailing Edge Dimming	/TD
3 Hour Emergency	/M3
3 Hour Emergency Self Test	/ST

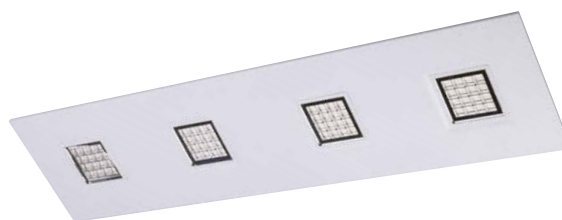

### Accessories

ACCESSORY	CODE
Surface fame kit	AV415501 (595x595) AV415502 (1195x295) AV415503
Plasterboard Ceiling Frame	AV45504 (595x595) AV45505 (1195x295) AV45506 (1195x595)
Suspension Kit	AV45507



MG Lites, 4 Denaby Lane Industrial Estate, Coalpit Road, Denaby, Doncaster, South Yorkshire, DN12 4LH