

Description

The MG CET is a surface mounted LED luminaire with oval profile and high impact resistance.

Environment

Outdoor/Indoor

Installation

Surface mounted

Application

For use retail, education and commercial applications.



General Data

Voltage	AC220-240V 50-60Hz
Power Factor	>0.95
Light Source	LED
LED Lifetime	40,000hrs/ L70B50
Operating temperature	-15°C to 35°C
Materials	Polycarbonate body - white finish Opal polycarbonate diffuser high impact resistant


Light Data

Lumens per Watt	90lm/W
-Light Source	LED
CRI	80
Light Distribution	Direct

Product Variants

Product Code	System Power (W)	System efficacy (lm/W)	Lumens (lm)	CCT (K)	Length mm	Width mm	Diameter mm	Weight kg
MG CET LED1X1200 D671 T830 OP	12	90	1080	3000	160	160	63	0.19

Dimensions

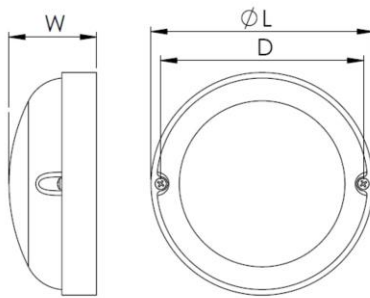

L, mm	W, mm	D, mm
160	63	146