

Description

The MGGRUS is a compact LED flood light with aesthetic design and narrow beam optics.

Environment

Outdoor

Installation

Designed to be wall mounted

Application

Suitable for façade illumination, outdoor public spaces and other similar applications



General Data

Voltage	AC220-240V 50-60Hz
Power Factor	>0.60
Light Source	LED
LED Lifetime	50,000hrs/ L70B50
Operating temperature	-25°C to +40°C
Materials	Die-cast aluminium body, dark grey finish Tempered glass diffuser, impact resistant with stainless steel screws
Installation	Suitable for any horizontal or vertical surface


Light Data

Lumens per Watt	96-103lm/W
Light Source	LED
CRI	70
Optics	30°

Product Variants

Product Code	System Power (W)	System efficacy (lm/W)	Lumens (lm)	CCT (K)	Length mm	Width mm	Height mm	Weight kg
MGGRUS LED1X800 C313 T840 L30	7.8	103	802	4000	120	120	90	0.9
MGGRUS LED1X1100 C314 T840 L30	11.3	96	1087	4000	120	120	90	0.9

Photometrics

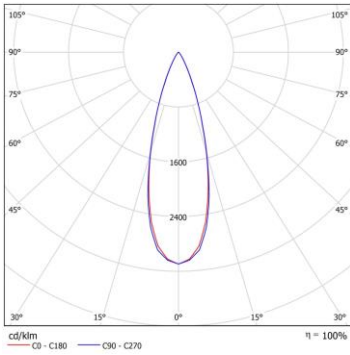

Product Images

