

Description

The MGANT is a surface LED downlight with deepened faceted reflector, cylindrical shape and attractive look.

Environment

Indoor

Installation

Designed to be surface mounted

Application

Suitable for retail, showrooms, hotels and other similar applications



General Data

Voltage	AC220-240V 50-60Hz
Power Factor	>0.90
Light Source	LED
LED Lifetime	50,000hrs/ L80B50
Operating temperature	0°C to +35°C
Materials	Faceted aluminium reflector 40 degree UGR<19 Die-cast aluminium body, white finish
Installation	Designed to be surface mounted.

Light Data

Lumens per Watt	102-113lm/W
Light Source	LED
CRI	80
Distribution	Direct


Product Variants

Product Code	System Power (W)	System efficacy (lm/W)	Lumens (lm)	CCT (K)	Length mm	Width mm	Height mm	Weight kg
MGANT LED1X1600 D342 T830	14.1	110	1549	3000	168	168	172	1
MGANT LED1X2300 D343 T830	20.7	104	2150	3000	168	168	172	1
MGANT LED1X3000 D344 T830	28.4	102	2900	3000	168	168	172	1
MGANT LED1X1600 D342 T830	14.1	113	1597	4000	168	168	172	1
MGANT LED1X2300 D343 T830	20.7	107	2216	4000	168	168	172	1
MGANT LED1X3000 D344 T830	28.4	105	2990	4000	168	168	172	1

Options

Driver with DALI interface	DALI
Driver with switch control dimming	SDIM
Suspended versions	SUS
Strain relief for power cable	1G
3000K	T830
4000K	T840

Dimensions

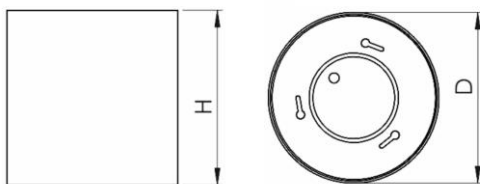

\varnothing D, mm	H, mm
168	172