

MG-GEN131 Wall Wash

Description

A range of architectural wall wash with a matt black darklight baffle developed to minimise glare.

Environment

Indoor

Installation

Recessed mounted

Application

For use in retail, restaurants and other commercial applications.




5YR Warranty	 IP20 Protection	50,000hrs Lifetime
------------------------	---	------------------------------



General Data

Voltage	AC220-240V 50-60Hz
Power Factor	>0.5 - 0.97
Light Source	LED
CCT	2700K/3000K/4000K
LED Lifetime	50,000hrs/L80F10
Operating temp	-25°C to 35°C
Materials	Die cast aluminium body

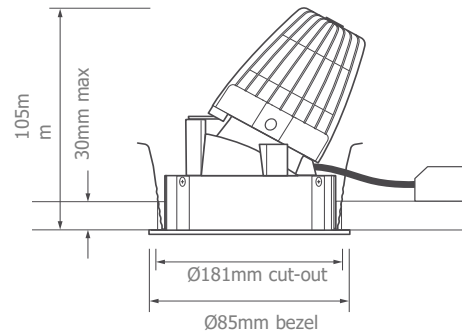

Light Data

Lumens per Watt	56-87lm/W
Light Source	LED
CRI	80/90
Distribution	40° as standard (20° option available)

Product Variants

Product Code	System Power (W)	System efficacy (lm/W)	Lumens (lm)	CCT (K)	Maximum Operating Temp	Power Factor
MGGEN131-001	8.2	56.9	464	2700	+35	0.91
MGGEN131-002	6.2	82.4	508	3000	+35	0.97
MGGEN131-003	6.2	87	537	4000	+35	0.97
MGGEN131-004	10.1	64.1	645	2700	+25	0.88
MGGEN131-005	8.2	80.4	658	3000	+25	0.50
MGGEN131-006	8.2	84.9	695	4000	+25	0.50

Options

OPTION	CODE
20° Narrow Beam reflector	/NB
SwitchDIM, DALI or DSI	/ECO
Casambi Bluetooth wireless control inc dim	/BTC
Emergency conversion	/EM
DALI and self test Emergency conversion	/EMD
Emergency conversion -Integral indicator	/EMI
DALI / Self test Emergency conversion Integral indicator	/EMDI
Plaster in bezel version	/PI
RA90 High colour rendering	/9
White Soft light baffle	/WSB
Tiltable	/TLT



Plaster in bezel version
(cut out Ø81mm)



White Soft light baffle



Tiltable