

Description

The MGAUR is a traditional recessed LED downlight with clear diffuser and faceted reflector for a better glare control.

Environment

Indoor

Installation

Designed to be recess mounted

Application

Suitable for retail, showrooms, hotels and other similar applications



General Data

Voltage	AC220-240V 50-60Hz
Power Factor	>0.95
Light Source	LED
LED Lifetime	75,000hrs/ L80B50
Operating temperature	0°C to +35°C
Materials	Clear glass diffuser Faceted aluminium reflector 60 degree standard UGR<19 Die-cast aluminium white finish body
Installation	Designed to be recess mounted. Requires a cut-out Ø195mm.


Light Data

Lumens per Watt	97-117lm/W
Light Source	LED
CRI	80
Distribution	Direct

Product Variants

Product Code	System Power (W)	System efficacy (lm/W)	Lumens (lm)	CCT (K)	Length mm	Width mm	Height mm	Weight kg
MGAUR LED1X1600 D329 T830 CLR	14.1	114	1606	3000	195	195	100	0.8
MGAUR LED1X2300 D330 T830 CLR	19.6	114	2229	3000	195	195	100	0.8
MGAUR LED1X3000 D331 T830 CLR	28.1	107	3006	3000	195	195	100	0.8
MGAUR LED1X1600 D329 T840 CLR	14.1	117	1656	4000	195	195	100	0.8
MGAUR LED1X2300 D330 T840 CLR	19.6	117	2297	4000	195	195	100	0.8
MGAUR LED1X3000 D331 T840 CLR	28.1	110	3099	4000	195	195	100	0.8
MGAUR LED1X1600 D329 T830 OP LT80	14.1	103	1455	3000	195	195	100	0.8
MGAUR LED1X2300 D330 T830 OP LT80	19.6	103	2019	3000	195	195	100	0.8
MGAUR LED1X3000 D331 T830 OP LT80	28.1	97	2723	3000	195	195	100	0.8
MGAUR LED1X1600 D329 T840 OP LT80	14.1	106	1500	4000	195	195	100	0.8
MGAUR LED1X2300 D330 T840 OP LT80	19.6	106	2081	4000	195	195	100	0.8
MGAUR LED1X3000 D331 T840 OP LT80	28.1	100	2807	4000	195	195	100	0.8
MGAUR LED1X1600 D329 T830 MPRZ LT92	14.1	106	1492	3000	195	195	100	0.8
MGAUR LED1X2300 D330 T830 MPRZ LT92	19.6	106	2071	3000	195	195	100	0.8
MGAUR LED1X3000 D331 T830 MPRZ LT92	28.1	99	2794	3000	195	195	100	0.8
MGAUR LED1X1600 D329 T840 MPRZ LT92	14.1	109	1539	4000	195	195	100	0.8
MGAUR LED1X2300 D330 T840 MPRZ LT92	19.6	109	2135	4000	195	195	100	0.8
MGAUR LED1X3000 D331 T840 MPRZ LT92	28.1	102	2880	4000	195	195	100	0.8

Dimensions

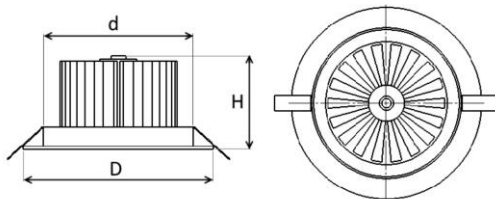

∅ D, mm	d, mm	H, mm	A, mm
195	153	100	165

Options

Driver with DALI interface	DALI
Driver with switch control dimming	SDIM
Emergency version 3 hours	EM3
Emergency version with autonomous testing system 3 hours	EM3A
Emergency version 3 hours with DALI interface	EM3D
Opal diffuser with high light transmission	OP LT80
Translucent micro-prismatic diffuser with high light transmission	MPRZ LT92
3000K	T830
4000K	T840

Product Images

