

Description

The MGPUP is a surface mounted LED luminaire with oval profile and high impact resistance.

Environment

Outdoor/Indoor

Installation

Surface mounted

Application

For use retail, education and commercial applications.



General Data

Voltage	AC220-240V 50-60Hz
Power Factor	>0.95
Light Source	LED
LED Lifetime	40,000hrs/ L70B50
Operating temperature	-15°C to 35°C
Materials	Polycarbonate body - white finish Opal polycarbonate diffuser high impact resistant


Light Data

Lumens per Watt	100lm/W
-Light Source	LED
CRI	70
Light Distribution	Direct

Product Variants

Product Code	System Power (W)	System efficacy (lm/W)	Lumens (lm)	CCT (K)	Length mm	Width mm	Height mm	Weight kg
MGPUP LED1X500 D541 T730 OP	5	100	500	3000	171	71	45	0.18

Dimensions

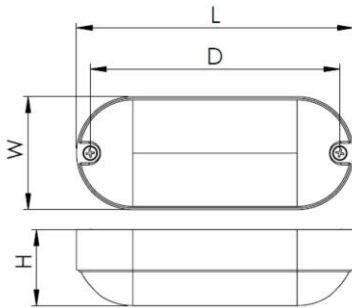

L, mm	W, mm	H, mm	D, mm
171	71	45	155